


absorbALL Extender

absorbALL 1250

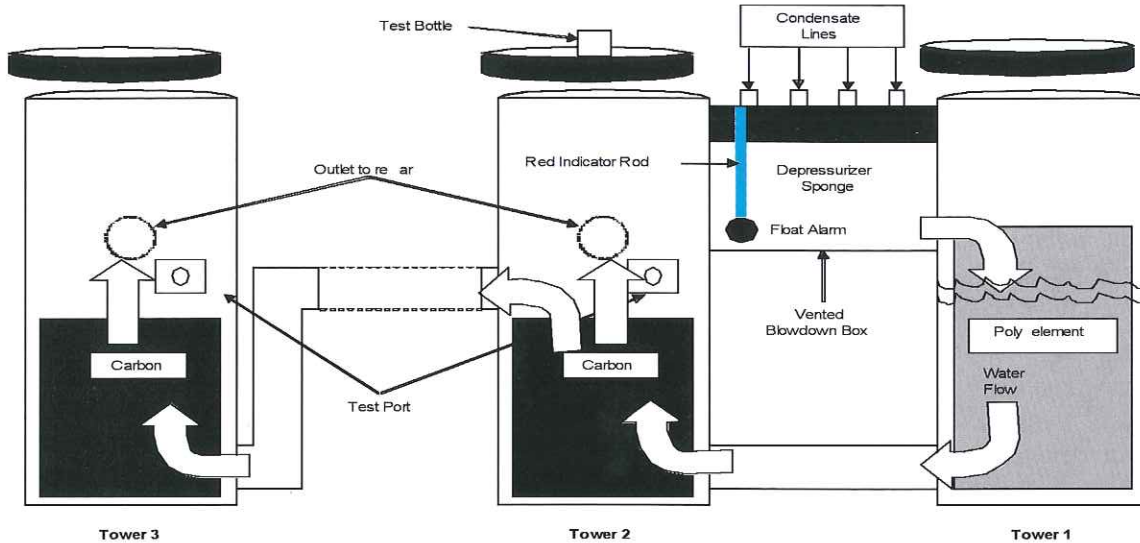

	Enviro	520	750	1250	Extender
Target output value	<20 ppm	<20 ppm	<20 ppm	<20 ppm	<20 ppm
Activated carbon elements	1 each	1 each	1 each	1 each	2 each
Inlet connections	¼", 3/8", ½" (3 total)	½" (2 ea)	½" (2 ea)	½" (4 ea)	½" (2 ea)
Outlet connection	½"	½"	½"	½"	½"
TEST valve	yes	yes	yes	yes	yes
Service drain	yes	yes	yes	yes	yes
Overflow Indicator	no	yes	yes	yes	yes
Housing material	PE	PE	PE	PE	PE
Total recyclable	yes	yes	yes	yes	yes
Polyglycol coolants	no	yes*	yes*	yes*	yes*
Max. compressor capacity**	65 cfm	300 cfm	750 cfm	1250 cfm	1500/2500 cfm
Dimensions (inches)					
Height	27.75	26.20	38	45.47	34.43
Width	10.25	27.56	32	41.00	34.05
Depth	10.75	11.81	16	17.12	15.35
Weight (pkg.w/out pallet)	11 lbs	50 lbs	109 lbs	130 lbs	84 lbs

Typical absorbALL Properties

All absorbALL models can accept condensate discharge from intelligent drains, timer drains, float drains and manual drains. Additional condensate can be manually added.

Capacity may be less with ATF, Polyglycol, or Silicone.

* A special polyelement is required for removal of polyglycol coolants. **Capacity at 125 psi. Higher pressures may create more stable emulsions and make separation more difficult or impossible.